

# U2741A USB Modular Digital Multimeter

## Keysight U2741A USB Modular Digital Multimeter (DMM)

The U2741A is a 5.5-digit DMM the size of a typical novel, and flexibly operates as a standalone unit or as a modular unit in the U2781A USB modular product chassis.

**Notice:** The U2741A will be discontinued on June 1, 2024. The last day to place order for this product is May 31, 2024. Keysight will continue to provide world-class support for this product for the standard period of 5 years.



## Put a Bench in Your Bag

The next time you're called out to solve tough problems in electronic products or processes, leave the bulky transit cases behind. With Keysight Technologies, Inc.'s USB modular instrument (MI) family, you can easily carry powerful test gear in your bag along with your laptop PC. Our line of MIs includes two oscilloscopes, a DMM, a function generator with arbitrary waveform capability, a source/measure unit and a 4x8 switch matrix. All provide USB 2.0 connectivity (with USBTMC-USB488) standard and plug-and-play simplicity for easy use on the go or on the bench.



Figure 1. Keysight's USB Modular Instrument (MI) family



Figure 2. U2741A used as a standalone instrument

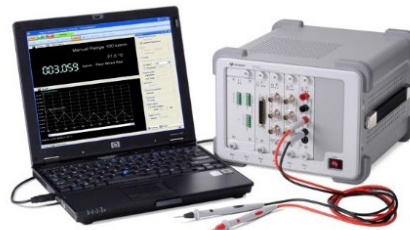


Figure 3. U2741A used as a modular instrument

\*Note: The U2741A needs to be powered on with an AC adaptor.

## Features

- Measures up to 10 different measurements including frequency and temperature
- Fast measurements up to 100 readings/s
- Wide voltage measurement range (DC from 1  $\mu$ VDC to 300 VDC, AC from 1  $\mu$ Vrms to 250 Vrms)
- Wide current measurement range (DC from 1  $\mu$ ADC to 2 ADC, AC from 1  $\mu$ Arms to 2 Arms)
- Hi-Speed USB 2.0 connectivity
- Dual-play operation: standalone and modular capability
- NEW! Control, automate and simplify with Keysight BenchVue software. Now included.
- Compatible with a wide range of Keysight Development Environments (KDEs)



### Awards & Accolades

Keysight U2700A series USB Modular Instruments won Design News' Golden Mousetrap Award in the 2009 Best Products Category. Design News' Awards program highlights engineering innovation and product design creativity and honors the best designs of the past year.

## Control, Automate and Simplify with BenchVue – No Programming Needed (Now Included)

Keysight BenchVue software for the PC eliminates many of the issues around bench testing. By making it simple to connect, control instruments, and automate test sequences, you can quickly move past the test development phase and access results faster than ever before with just a few clicks. Dedicated instrument apps allow you to quickly configure the most commonly used measurements and setups for each instrument family. Rapidly build custom test sequences with the integrated Test Flow app to automate and visualize test results without the need for instrument programming. BenchVue supports hundreds of Keysight instrument types and models all from one easy to use application. Control, Automate, Simplify with BenchVue.

### Product Characteristics and General Specifications

Product Characteristics and General Specifications
<b>Remote Interface</b>
<ul style="list-style-type: none"><li>• Hi-Speed USB 2.0*</li><li>• USBTMC-USB488 1</li></ul>
<b>Power Consumption</b>
<ul style="list-style-type: none"><li>• +12 VDC, 2A maximum</li><li>• Isolated ELV supply source</li></ul>
<b>Operating Environment</b>
<ul style="list-style-type: none"><li>• Operating temperature from 0°C to 55°C</li><li>• Relative humidity at 50% RH (non-condensing)</li><li>• Altitude up to 2000 meters</li><li>• Pollution Degree 2</li><li>• For indoor use only</li></ul>
<b>Storage Compliance</b>
<ul style="list-style-type: none"><li>• Storage temperature from –20°C to 70°C</li><li>• Relative humidity at 5% to 90% RH (non-condensing)</li></ul>
<b>Safety &amp; EMC Compliance</b>
Refer to Declaration of Conformity for the latest revisions of regulatory compliance at: <a href="http://www.keysight.com/go/conformity">www.keysight.com/go/conformity</a>

Measurement Compliance
CAT II 300 V Over-voltage protection
Common Mode Rejection Ratio (CMRR)
<ul style="list-style-type: none"> <li>• DC CMRR &gt; 120 dB with 1k unbalanced load</li> <li>• AC CMRR &gt; 70 dB at 50/60 Hz <math>\pm 0.1\%</math> with 1k unbalanced load</li> </ul>
Normal Mode Rejection Ratio (NMRR)
<ul style="list-style-type: none"> <li>• 60 dB at 50/60 Hz <math>\pm 0.1\%</math> <sup>2</sup></li> <li>• &gt; 0 dB at 50/60 Hz <math>\pm 0.1\%</math> <sup>3</sup></li> </ul>
Shock and Vibration
Tested to IEC/EN 60068-2
IO Connection
Four banana socket terminals
Dimension (W x D x H)
<p>Module dimension:</p> <ul style="list-style-type: none"> <li>• 117.00 mm x 180.00 mm x 41.00 mm (with bumpers)</li> <li>• 105.00 mm x 175.00 mm x 25.00 mm (without bumpers)</li> </ul>
Weight
<ul style="list-style-type: none"> <li>• 509 g (with bumpers)</li> <li>• 451 g (without bumpers)</li> </ul>
Calibration
Calibration internal of one year is highly recommended
<p>Notes:</p> <ol style="list-style-type: none"> <li>1. Compatible with Microsoft Windows operating systems only. Requires a direct USB connection to the PC so the appropriate driver can be installed in the USB modular instrument.</li> <li>2. Applicable for NPLC &gt; 1.</li> <li>3. Applicable for NPLC 0.2 and 0.02.</li> </ol>

# Product Outlook and Dimensions

**Product Outlook and Dimensions**

The diagram illustrates the physical characteristics of the Keysight U2751A Digital Multimeter. It includes three views: a front view showing the display and function buttons, a rear view showing the input jacks and USB port, and a top view showing the overall footprint. Dimensions are provided for each view: the height is 41.00 mm, the width is 117.00 mm, the depth is 180.00 mm, and the base thickness is 8.60 mm.

**Front view**

**Rear view**

**Top view**

**Optional Accessories**

- E2308A Thermistor temperature probe
- USB Secure 2-m cable

# Product Specifications

## DC specifications <sup>1</sup>

Function	Range	Input impedance	Test current/ Burden voltage, Shunt resistance	Accuracy ±(% of reading + % of range)	Temperature coefficient 0°C to 18°C 28°C to 55°C
Voltage <sup>2</sup>	100.000 mV	10 MΩ	-	0.015 + 0.008	0.002 + 0.0008
	1.00000 V	10 MΩ	-	0.015 + 0.005	0.001 + 0.0005
	10.0000 V	10 MΩ	-	0.018 + 0.005	0.002 + 0.0005
	100.000 V	10 MΩ	-	0.018 + 0.005	0.002 + 0.0005
	300.000 V	10 MΩ	-	0.018 + 0.005	0.002 + 0.0005
Current <sup>3</sup>	10.0000 mA	-	< 0.2 V, 10 Ω	0.06 + 0.015	0.005 + 0.0025
	100.000 mA	-	< 0.2 V, 1 Ω	0.06 + 0.005	0.008 + 0.002
	1.0000 A	-	< 0.3 V, 0.1 Ω	0.15 + 0.007	0.005 + 0.002
	2.0000 A	-	< 0.8 V, 0.1 Ω	0.15 + 0.007	0.005 + 0.002
Resistance <sup>4</sup>	100.000 Ω	-	1.0 mA	0.03 + 0.008	0.006 + 0.0008
	1.00000 kΩ	-	1.0 mA	0.03 + 0.005	0.006 + 0.0005
	10.0000 kΩ	-	100 μA	0.03 + 0.005	0.006 + 0.0005
	100.000 kΩ	-	10.0 μA	0.03 + 0.005	0.006 + 0.0005
	1.00000 MΩ	-	1 μA	0.06 + 0.005	0.01 + 0.0005
	10.0000 MΩ	-	225 nA	0.25 + 0.005	0.025 + 0.0005
	100.000 MΩ	-	225 nA    10 MΩ	2.0 + 0.005	0.3 + 0.0005
Diode test <sup>5</sup>	1.0000 V	-	1.00 mA	0.015 + 0.03	0.005 + 0.0005
Continuity test <sup>6</sup>	1.0000 kΩ	-	1.00 mA	0.05 + 0.03	0.005 + 0.0005
Notes: 1. Specifications are based on 30 minutes warm-up time, NPLC 20 resolution, calibration temperature within 18°C to 28°C, and Null function enabled. For NPLC 0 and 0.025, add 0.01% of range. 2. 120% over range on all ranges except 300 VDC. Input protection up to 300 VDC. 3. Input protected with externally accessible 2 A, 250 V fast blown fuse. 4. Specifications are applicable with Null function enabled. Otherwise, add 0.2 Ω additional error. Input protection up to 300 VDC. Specifications apply for NPLC ≥ 1. 5. Specifications are for the voltage measured at the input terminals only. 6. Continuity threshold is fixed at less than 10 Ω.					

## AC accuracy for voltage <sup>1</sup>

### AC specifications

Function	Range	Accuracy input $\pm$ (% of reading + % of range) Frequency (Hz)			
		20 ~ 45	45 ~ 10k	10k ~ 30k	30k ~ 100k <sup>3</sup>
Voltage <sup>2</sup>	100.000 mVrms	1 + 0.1	0.2 + 0.1	1.5 + 0.3	5.0 + 0.3
	1.00000 V	1 + 0.1	0.2 + 0.1	1.0 + 0.1	3.0 + 0.2
	10.0000 V	1 + 0.1	0.3 + 0.1	1.0 + 0.1	3.0 + 0.2
	100.000 V	1 + 0.1	0.3 + 0.1	1.0 + 0.1	3.0 + 0.2
	250.000 V <sup>4</sup>	1 + 0.1	0.3 + 0.1	1.0 + 0.1	3.0 + 0.2
Function	Range	Frequency (Hz) (% of reading + % of range)			
		20 ~ 45	45 ~ 10k	10k ~ 30k	30k ~ 100k
Temperature coefficient	100.000 mVrms	0.02 + 0.02	0.02 + 0.02	0.05 + 0.02	0.1 + 0.02
	1.00000 V				
	10.0000 V				
	100.000 V				
	250.000 V <sup>4</sup>				
Function	Range	Burden voltage, Current shunt resistance	Accuracy input $\pm$ (% of reading + % of range) Frequency (Hz)		
			20 ~ 45	45 ~ 1k	1k ~ 10k
Current <sup>5</sup>	10.0000 mA	< 0.2 V, 10 $\Omega$	1.5 + 0.1	0.5 + 0.1	2 + 0.2
	100.000 mA	< 0.2 V, 1 $\Omega$	1.5 + 0.1	0.5 + 0.1	2 + 0.2
	1.00000 A	< 0.3 V, 0.1 $\Omega$	1.5 + 0.1	0.5 + 0.1	2 + 0.2
	2.00000 A	< 0.8 V, 0.1 $\Omega$	1.5 + 0.1	0.5 + 0.1	2 + 0.2
Function	Range	Accuracy input $\pm$ (% of reading + % of range) Frequency (Hz)			
		20 ~ 45	45 ~ 10k	10k ~ 30k	
Temperature coefficient	10.0000 mA	0.02 + 0.02	0.02 + 0.02	0.02 + 0.02	
	100.000 mA				
	1.00000 A				
	2.00000 A				

**Notes:**

To ensure better measurement results and to guard against the change of environment or setup, always enable the Null offset.

1. Specifications are based on 30 minutes warm-up time and calibration temperature within 18°C to 28°C. In manual range, the settling time is 6 seconds while in autorange, the first measurement accuracy is < 1%.
2. Specifications are for sine wave inputs more than 5% of range. 120% over range on all ranges except 250 VAC. Maximum crest factor of 5 at full scale. Input impedance is 1 MΩ in parallel with capacitance less than 120 pF, AC couple with up to 300 VDC.
3. Additional error to be added as frequency more than 30 kHz and signal input less than 10% of range. 30 kHz to 100 kHz: add 0.003% of range per kHz.
4. Input signal has to be more than 50 Vrms.
5. Input protected with externally accessible 2 A, 250 V fast blown fuse.

## Frequency Specifications <sup>1</sup>

### Frequency accuracy

Function	Range	Accuracy (% of reading + % of range)	Minimum input frequency	Temperature coefficient (% of range)
Frequency	20 Hz to 300 kHz	0.0200 + 0.003	1 Hz	0.005

### Frequency sensitivity for AC voltage

Function	Range	Minimum sensitivity (RMS sine wave) Frequency (Hz)	
		20 ~ 100k	100k ~ 300k
AC voltage	100 mV <sub>2</sub>	20 mV	20 mV
	1 V	100 mV	120 mV
	10 V	1 V	1.2 V
	100 V	10 V	20 V
	250 V	100 V	120 V



## Temperature Specifications

### Temperature specifications

Function	Thermistor type	Range	Accuracy	Temperature coefficient
Temperature	5 k $\Omega$ thermistor	-80.0°C to 150°C	Probe accuracy + 0.2°C	0.002°C

Note:  
To ensure better measurement results and to guard against the change of environment or setup, always enable the Null offset.

### Typical reading speed (in seconds) characteristics

Test/Range	100 mV(20 Hz)	1V(20 Hz)	10V(20Hz)	100V(45 Hz)	300V(45 Hz)
ACV	0.979	0.979	0.978	0.979	0.979

Test/Range	10 mA	100 mA	1 A	2 A
ACI	0.979	0.979	0.979	0.979
Freq	1.190			

Notes:

1. Frequency measurement can only be done in auto range mode. Specifications are for 30 minutes warm-up time, using one second aperture.
2. Measuring method is using reciprocal counting technique with AC coupled input at AC voltage function. Gate time of 0.1 second or 1 second.
3. Only applicable for square wave measurement.

Test	Range/NPLC	20	10	2	1	0.025	0
DCV	100 mV	0.413	0.213	0.053	0.033	0.016	0.016
	1 V	0.414	0.213	0.053	0.033	0.016	0.016
	10 V	0.413	0.213	0.053	0.033	0.016	0.016
	100 V	0.414	0.214	0.053	0.033	0.016	0.016
	300 V	0.413	0.213	0.053	0.033	0.016	0.016
DCI	10 mA	0.413	0.214	0.053	0.033	0.016	0.016
	100 mA	0.393	0.213	0.053	0.033	0.016	0.016
	1 A	0.414	0.213	0.053	0.033	0.016	0.016
	2 A	0.413	0.213	0.053	0.033	0.016	0.016
2W	100 $\Omega$	0.414	0.214	0.053	0.033	0.016	0.016
	1 k $\Omega$	0.414	0.213	0.053	0.033	0.016	0.016
	10 k $\Omega$	0.413	0.214	0.054	0.033	0.016	0.016
	100 k $\Omega$	0.413	0.213	0.053	0.033	0.016	0.016
	1 M $\Omega$	0.413	0.213	0.053	0.033	0.016	0.016
	10 M $\Omega$	0.413	0.213	0.053	0.033	0.016	0.016
	100 M $\Omega$	0.413	0.214	0.053	0.033	0.016	0.016

Test	Range/NPLC	20	10	2	1	0.025	0
4W	100 $\Omega$	0.863	0.461	0.141	0.102	0.063	0.062
	1 k $\Omega$	0.830	0.431	0.110	0.069	0.030	0.030
	10 k $\Omega$	0.829	0.430	0.110	0.069	0.030	0.030
	100 k $\Omega$	0.830	0.430	0.110	0.069	0.030	0.030
	1 M $\Omega$	0.831	0.431	0.110	0.070	0.030	0.030
	10 M $\Omega$	0.986	0.585	0.265	0.225	0.186	0.186
	100 M $\Omega$	0.986	0.585	0.265	0.225	0.186	0.186

## Test Conditions of PC and USB DMM Module

- Processor: Intel Core 2 Duo Processor E8400 3.00 GHz, 6 MB L2 cache, 1333 MHz FSB
- Memory: 2GB DDR2
- Hard Disk Drive (HDD): 160GB
- Microsoft Windows XP
- Professional Version 2002, Service Pack 2.
- The module is loaded with FW revision 1.12 and running with KMM version is 1.8.7.0

## USB Modular Digital Multimeter App within BenchVue

BenchVue software for the PC makes it simple to connect, control, capture and view multiple Keysight instruments simultaneously with no additional programming. You can derive answers faster than ever by easily viewing, logging and exporting measurement data and screen images with a few clicks from a single environment.

- Visualize multiple measurements simultaneously
- Easily log data, screen shots and system state
- Rapidly prototype custom test sequences
- Recall past states of your USB Modular to replicate results
- Export measurement data in the desired format fast
- Quickly access manuals, drivers, FAQs and videos



Figure 4. View measurements across USB DAQ, modular and bench instruments all on one BenchVue interface

The USB Modular Digital Multimeter App within BenchVue allows you to quickly configure and control the U2741A DMM to visualize measurements, perform data logging and annotate captured data. With BenchVue, you can display single measurements, charts or tables, from either a single U2741A DMM or multiple U2741A DMMs simultaneously to correlate trends you might otherwise miss. In just a few clicks, you can also record measurements and export results to popular PC-friendly applications such as Microsoft Excel and Microsoft Word for further analysis.

Get started with BenchVue, downloadable at no cost at [www.keysight.com/find/benchvue](http://www.keysight.com/find/benchvue)

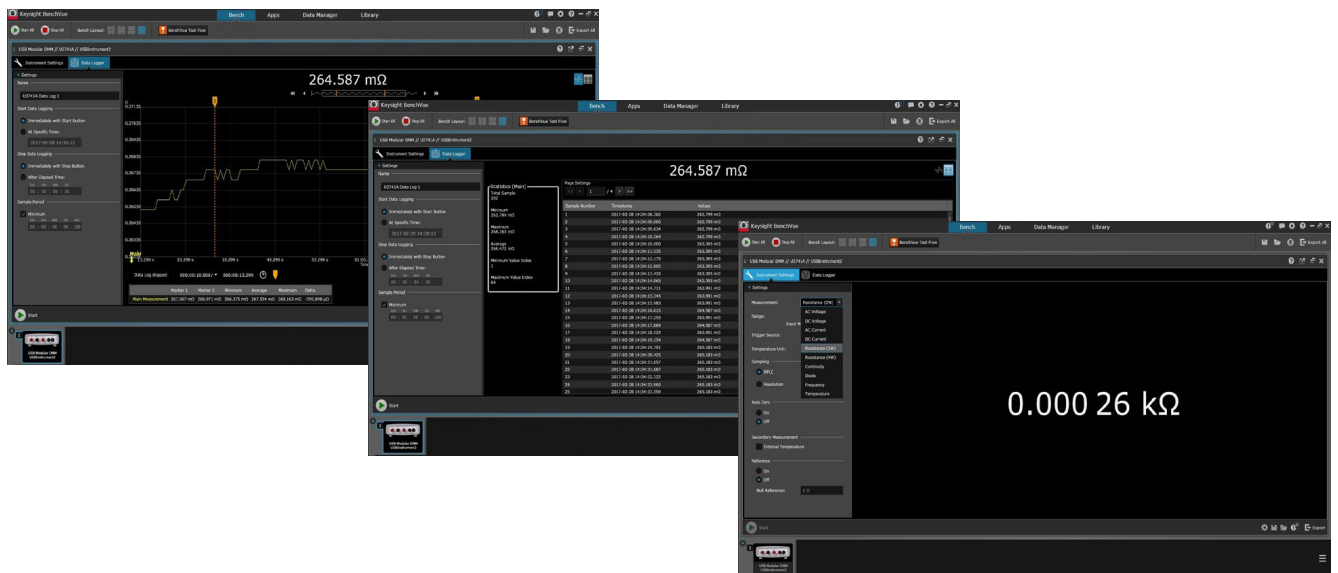


Figure 5. View measurements how you want it. Visualize measurements easily in chart or tabular form, or simply display single measurements.

## Other Products in the Keysight USB Modular Test Instruments Family



### U2701A/U2702A USB Modular Oscilloscope

Features:

- High sampling rate up to 500 MSa/s, enabling accurate measurement analysis
- Up to 32 MB large memory
- Fast Fourier transfer (FFT) and waveform math functions enable easy waveform calculation

For more information: <http://www.keysight.com/find/usbscope>



### U2722A/U2723A USB Modular Source Measure Unit

Features:

- Three-channel SMU with four-quadrant source/measure operation
- High measurement sensitivity of 100 pA with 16-bit resolution for all voltage and current ranges
- 0.1% basic accuracy
- Embedded test scripts (for U2723A)

For more information: <http://www.keysight.com/find/U2722A>

<http://www.keysight.com/find/U2723A>



### U2751A USB Modular Switch Matrix

Features:

- Minimal cross-talk of -30 dB at 45 MHz wide bandwidth
- High bandwidth at 45 MHz without terminal block
- Capability to test up to four devices-under-test (DUTs)
- Works with other Keysight instruments for multi-point testing

For more information: <http://www.keysight.com/find/U2751A>



### U2761A USB Modular Function/Arbitrary Waveform Generator

Features:

- Direct digital synthesis (DDS) waveform generator
- Pulse generator that can generate pulse signal as stimulus
- Easy customization with Arbitrary Waveform Editor
- Internal modulation capability simplifies test setup

For more information: <http://www.keysight.com/find/U2761A>



## U2781A USB Modular Product Chassis

### Features:

- Expansion of channels for each modular product
- Multiple instrument synchronization
- Internal and external 10 MHz reference clock
- High-speed USB 2.0
- SSI/Star trigger bus synchronization between external trigger source and modules

For more information: <http://www.keysight.com/find/U2781A>

## Ordering Information

Model	Description
U2741A	USB modular digital multimeter

## Optional Accessories

Model	Description
34138A	Test lead set
E2308A	Thermistor temperature probe
U2921A-101	USB secure cable 2 m

Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications, or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

